


TECHNICAL DATA SHEET

Eurovent FLEX 3D

Chimney flashing made of aluminum sheet profiled into a three-dimensional pattern and butyl adhesive. Applied in roof works, especially in the areas around chimneys, bay windows and roof windows. Suitable also for joining surfaces of roof and wall.

Advantages:

- resistance to water and cold
- easy application thanks to 3D system
- flexibility
- covered with high quality butyl tape with easy application
- UV resistance

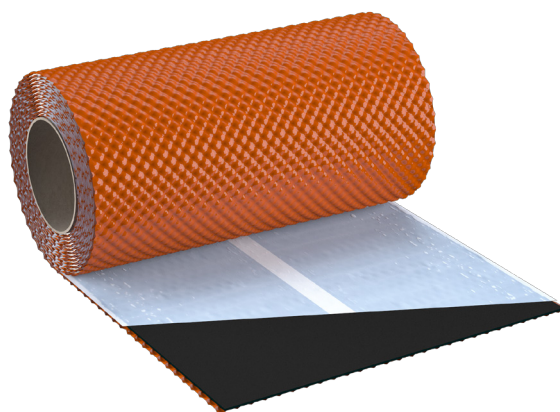

Technical data:

Parameter	Value
Material	Aluminum sheet, butyl tape
Aluminum sheet	Width: up to 450mm Thickness: 0,12 mm
Butyl tape	Size: up to 450mm x 1,0 mm, Color: black with liner, Density: 1,65 (± 0,05 g/cm ³) Peel strength : >25 (35 ± 10) N/24mm Diluents: gasoline extraction Resistance to aging: good, even in the heat-humidity conditions

Parameter	Value
Roll's width	up to 450mm
Roll's length	5 mb
Application temperature	From 5°C to 40°C
Available colors	wallred RAL 8004, brown RAL 8019, black RAL 9005, anthracite 7021, chestnut 8015, cherry RAL 3011, brown 8017 (on request)
Packaging	1 roll in a box 144 rolls on a pallet; 105 rolls (450mm)

Application:

Profiled flashing tape for use in sealing and finishing works around chimneys, bay windows and roof windows. Characterized by three-dimensional surface pattern to enable application in hard-to-reach areas. Product can also be used for joining the roof with the wall. Suitable for application with cement and clay roof tiles as well as metal roofing. Remove the safety liner. Apply tape in such a way that half of the tape is on the chimney, and the second half of the tape is on the tiles.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015

Storage / transport:

Rolls should be stored in a dry, covered, humidity-free area. Product should be stored in original, closed boxes. Please do not put any heavy items on the box, as they may cause damage to the box, and the rolls themselves. Please transport using a covered vehicle, protecting the rolls from damage. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015